




Windows & Doors

Lammin® Elegant MSE window

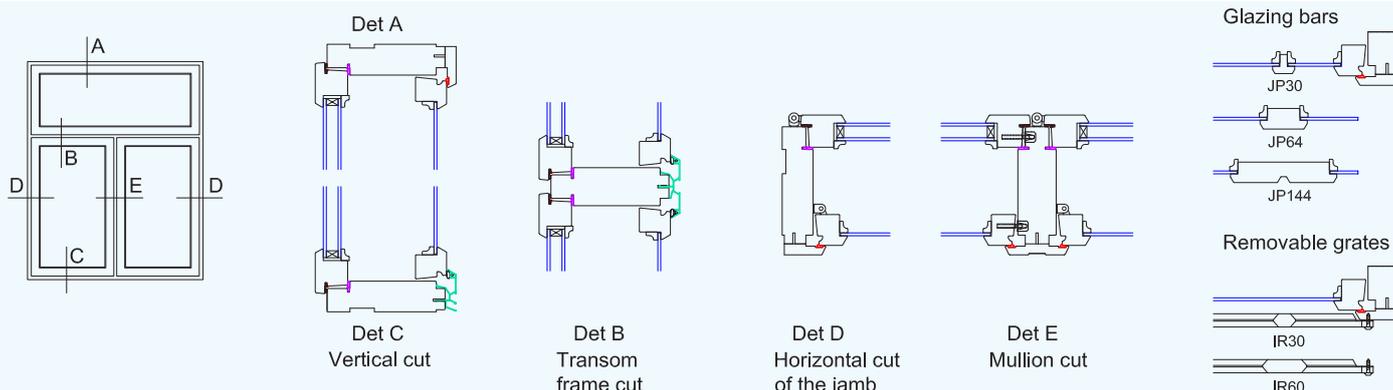

The bevelled shape of the inner sash of the Elegant series makes Lammin's sturdy inner sash appear more elegant, and the rectangular surface fittings selected for this set of models match the style. The windows are manufactured per the requirements indicated for the customer and the construction site. They are suitable for new structures and repair/renovation projects alike.

Lammin windows have been certified as qualified to bear the FI label, and they comply with the requirements set for the highest classes specified in EN standards for rainproof structure, airtightness, and withstanding of wind pressure. The dimensions, models, shapes, and colours; energy-efficiency of the glass portion; safety-related characteristics of the panes of glass; and additional features and equipment are always selected individually for each order and product.

The order and order confirmation with the product charts cover only the product quantities and quality, surface treatments, and equipment mentioned in them.

Raw wood material and surface finishing of wooden parts

All wooden parts of Lammin windows are made from carefully selected branchless Finnish pine that is expertly jointed and laminated.

- The frame structure is always finger-jointed and laminated solid pine. Frame surfaces that remain visible after installation are of branchless pine. The frame depths are 110, 131, 145, 175, and 200 mm.
- The inner sash of the painted product is of branchless finger-jointed pine.
- The inner sash of the product with translucent coating is non-finger-jointed pine, with a branchless surface visible from the inside.

The inward-facing surface of the inner sash and of the frame are polished with a machine, primed, plastered where required, and polished again carefully by machine prior to application of the final coat of paint. The same procedures are performed for the products with a translucent coating. For the white paint, the standard colour is NCS 0502-Y. The translucent tones are in accordance with the Teknos translucent-coating colour chart, including water-dilutable varnish for the inner sash surface. Refer to the colour selection chart.

Aluminium profiles and their surface finishing

The parts of the frame that are the most exposed to the rain and sunshine consist of aluminium profiles also in wooden windows. These parts are the outermost section of the sill of the window and the outermost part of the window with a horizontal mullion. The priming treatment used for aluminium profiles is yellow chroming, and the surface finishing is implemented with a powder coating in RR or RAL colours. Refer to the colour selection chart.

The method used for attachment of the aluminium cladding protecting the sill / horizontal mullion from the weather has been studied well, and testing has proved it to be sturdy. The mosquito-net sash has an aluminium frame, and its strength arises from a solid aluminium corner element inside the profile.

Ventilation between the wood and aluminium has been taken into account in the frame structures. The cladding profile of the sill is tightly plugged at its ends, it provides good storm-water removal, and there are a mounting groove and locking cam for convenient and tight 'snap-in' attachment of the flashing.

Glasses and glazing

All glasses are float glass of quality class 1. The insulation glasses used in the inner sash have FI approval, and their thickness is always at least 4 mm. The special glasses are selected order- or window-specifically in consideration of the energy-class requirements, needs for sound insulation, and safety-glass regulations. The glazing beads of white windows are UV protected, body-tinted white plastic. The glazing beads of the windows with a translucent coating or special paints are made of plastic or wood.

Fittings

The hinges are bolt hinges, M8×30 and 35/PS Fe/Zn. The lever bolts of ventilation windows are Abloy 68 Fe/Zn, and other locks of the opening light windows are Abloy 71 Fe/Zn for inner sashes and Abloy 72 Fe/Zn for outer sashes. Striker fittings for window locks and lever bolts are Fe/Zn. The stay fastener of the ventilation window is Abloy type WF 250 Muo/Al in grey as the standard delivery, or Morite Fe/Zn by separate order.

The casement handles of the ventilation window are Abloy Polar 56/062 Zn/JVA in white options and Zn/Cr in translucent colours. The window locks' escutcheons for the inner sash are white in the white windows; for translucent options, they are chromed. Refer to the colour selection chart.

Draught exclusion (weather strips)

The frame and casement structures are sturdy, and they create a 10 mm-space in both the inner sash beam and the frame rebate for special seal. The groove seal continues uninterrupted also around the casement corners. In products with a white paint finish, the seal is white; in other products, it is black. The outer sash seal is a black rubber seal installed in the aluminium profile groove, taking ventilation of the space within the casement into account.

Lammin Ikkuna Oy

PL 100 FI-16901 Lammi, Finland

Tel.: +358 10 841 1700 E-mail: myynti@lammin.fi

www.lammin.fi ovistudio.fi ikkunastudio.fi signal-window.com